

## Technical Data

### Accuracy\*

Micrometer head:  $\pm 3 \mu\text{m} / \pm 0.00015''$

Interchangeable rod:  $\pm(2+R/75) \mu\text{m} /$   
 $\pm[.00016+.00005 (R/3)]''$

### Flatness of reference face

63.5 mm (2.5") base:  $1.3 \mu\text{m} (.00005'')$

101.6 mm (4") base:  $2 \mu\text{m} (.00008'')$

### Flatness of measuring rod face:

0.3  $\mu\text{m}$

### Parallelism between reference face and measuring rod face\*:

$(4+R/50) \mu\text{m} /$   
 $[.00016+.00004 (R/2)]''$

\* R = max. range (mm/inch)


Note: Fractions rounded up



Dedicated fixtures enable rapid checking of depth micrometer setting accuracy after a rod change.

## SERIES 129 – Interchangeable Rod Depth Micrometer

- This type uses interchangeable rods to enable wide-range measurement.
- Measuring rod diameter:  $\varnothing 4$  mm.
- Measuring rod lock.
- Ratchet stop provides constant measuring force.

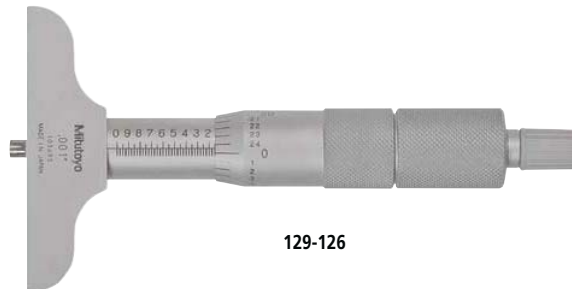

129-126



D

## Specifications

Metric					
Code No.	Range	Graduation	Base	No. of rods	
129-110	0-75 mm	0.01 mm	63.5 x 16 mm	3	
129-111	0-100 mm			4	
129-112	0-150 mm		101.6 x 16 mm	6	
129-116	0-300 mm			12	

Inch					
Code No.	Range	Graduation	Base	No. of rods	
129-126	0-3"	.001"	2.5 x .63"	3	
129-128	0-6"			6	
129-132	0-12"		4 x .63"	12	
129-150	0-12"				

## Dimensions

