




HANDTORQUE® SMALL DIAMETER SERIES



- HandTorque® models HT 30 and 60 have a higher torque output for a given gearbox diameter than the Standard Series
- Reduced diameter enables better access, particularly on pipe flanges
- Reaction taken from high strength spline
- Reaction foot can slide on the spline to allow sockets of various lengths
- Anti Wind-Up Ratchet available on all models (except 5:1 ratios), allowing safer and more practical operation
- If calibration is required, a UKAS accredited calibration certificate may be ordered (at extra cost)

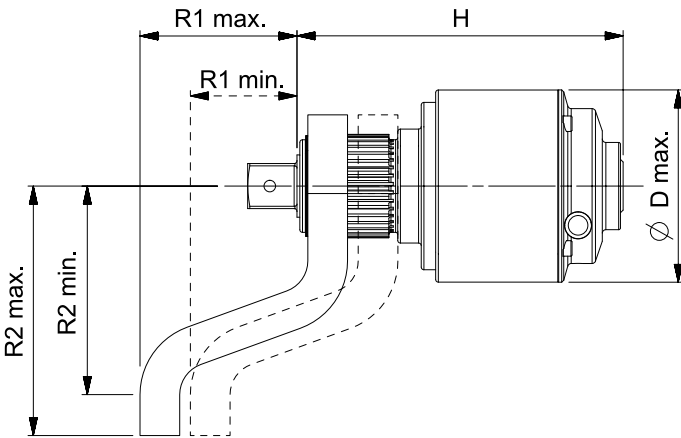

4	SMALL DIAMETER SERIES	
18003	HT 30/5, 3,000 N·m, ¾" in 1" out	
18004	HT 30/15, 3,000 N·m, ½" in 1" out AWUR	
18006	HT 30/25, 3,000 N·m, ½" in 1" out AWUR	
18009	HT 60/25, 6,000 N·m, ½" in 1½" out	
18008	HT 60/25, 6,000 N·m, ½" in 1½" out AWUR	
18013	HT 60/125, 6,000 N·m, ½" in 1½" out	

HT 30s and 60s are supplied with a cranked reaction foot. Most small diameter gearboxes are available without AWUR. Please enquire for part numbers.

NOTE: Model name does not reflect multiplication ratios, see mean multiplication ratios below

Model	HT 30/5	HT 30/15 AWUR	HT 30/25 AWUR	HT 60/25	HT 60/25 AWUR	HT 60/125
Part Number	18003	18004	18006	18009	18008	18013
Mean Multiplication Ratio	5.2:1	15:1	27:1	27:1	27:1	135:1
Dimensions (mm)	∅D max.	108	108	108	119	119
	H	164	183	183	212	240
	R1 min.	60	60	60	94	94
	R1 max.	88	88	88	119	119
	R2 min.	117	117	117	146	146
R2 max.	140	140	140	174	174	
Tool Weight (kg)	5.0	7.0	7.0	9.5	10.6	11.0
Reaction Weight (kg)	2.0	2.0	2.0	4.0	4.0	4.0

UKAS ACCREDITED CALIBRATION CERTIFICATION

The prices shown below are for 'As Found', for new manual torque multiplying gearboxes up to the maximum capacity shown.

12	ONE DIRECTION	
HTCC2.CW	Up to 6,000 N·m / 5,000 lbf·ft	
12	TWO DIRECTIONS	
HTCC2.CW+CCW	Up to 6,000 N·m / 5,000 lbf·ft	

