


subject to technical alterations

**type:** K  
**range:** 50 - 100 mm  
**range of indication:** 49,5 - 100,5 mm  
**digital step:** 0,01 mm  
**scale interval:** -  
**measuring force:** 0,8 - 1,7 N  
**weight:** 520 g

acceptable deviations  
 VDI/VDE/DGQ 2618 Bl. 12.1/13.1)  
**max. permissible errors "G":** 0,06 mm  
**repeatability "r":** 0,04 mm  
**reference temperature:** 20° C  
**operation temperature:** 10° C - 30° C  
**storage temperature:** -10° C - 50° C

**scale:** 1:2  
**drawing-nr.:** DAB-K4100T-K-e  
**date of issue:** 18.03.2021  
**name:** B. Schmidt  
**revision status:**  
**revision date:**

interface as accessories available:

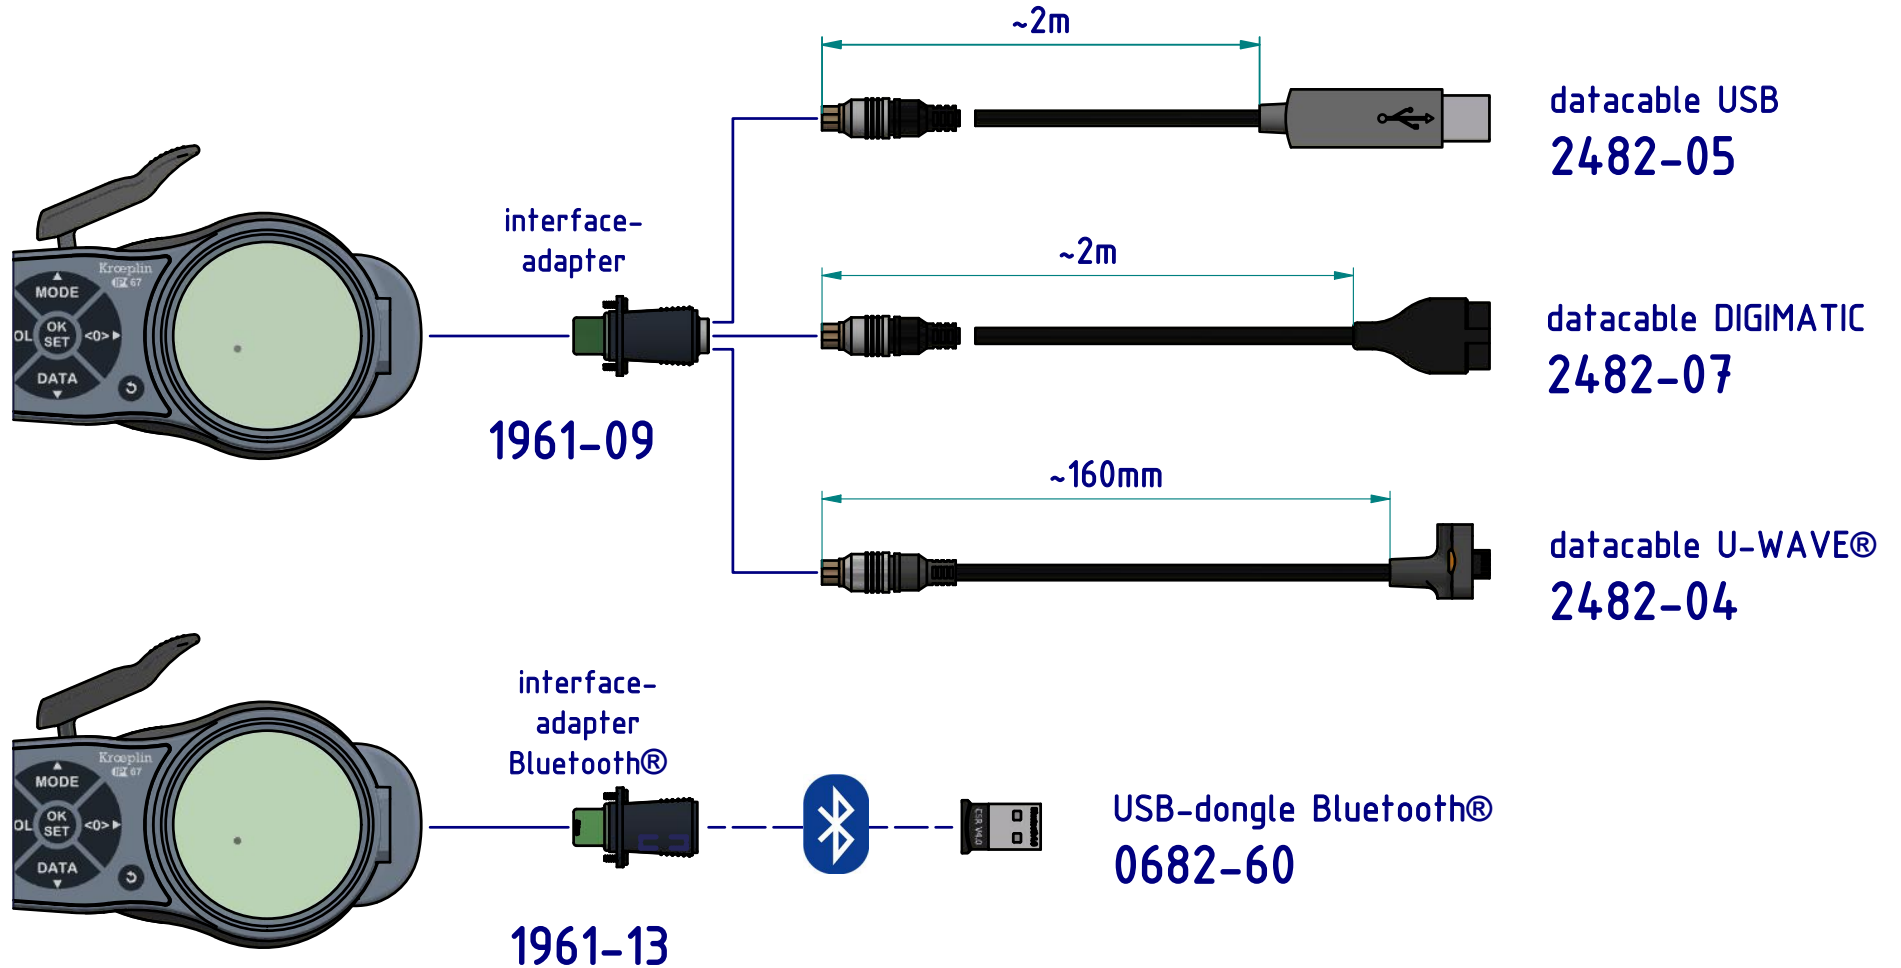

subject to technical alterations

drawing-nr.: DAB-K4100T-K-e  
date of issue: 18.03.2021  
name: B. Schmidt

revision status:  
revision date: