


**PK5522**

PK-100-SFG14-PSPKG/US/ /W

Pressure sensors

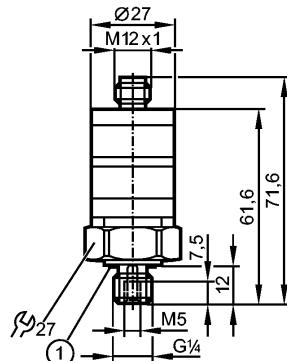

1: sealing FPM / DIN 3869-14

**Product characteristics**

Electronic pressure monitor

Connector

Process connection: G 1/4 A / M5 I

1 switching output

Measuring range: 0...100 bar / 0...1450 psi

Application

Application	Type of pressure: relative pressure Liquids and gases	
Pressure rating	200 bar	2900 psi
Bursting pressure min.	1000 bar	14500 psi
Medium temperature [°C]		-25...80

Electrical data

Electrical design	DC PNP	
Operating voltage [V]	9.6...32 DC	
Current consumption [mA]	< 25	
Insulation resistance [MΩ]	> 100 (500 V DC)	
Protection class	III	
Reverse polarity protection	yes	

Outputs

Output	1 switching output	
Output function	normally open	
Current rating [mA]	500	
Voltage drop [V]	< 2	
Short-circuit protection	pulsed	
Overload protection	yes	
Switching frequency [Hz]	100	

Measuring / setting range

Measuring range	0...100 bar	0...1450 psi
Setting range		
Set point, SP	3...100 bar	44...1450 psi

Hysteresis 2 bar 29 psi

Accuracy / deviations

Deviations (% of value of measuring range)

PK5522

PK-100-SFG14-PSPKG/US/ /W

Pressure sensors

Switch point accuracy	< ± 2.5 *)	
Characteristics deviation	< ± 1.5 (BFSL) / < ± 2.5 (LS) **)	
Repeatability	< ± 0.5	
Temperature drift (/ 10 K)	< ± 0.5	
in the temperature range [°C]	0...80	
Software / programming		
Adjustment of the switch point	setting ring	
Environment		
Ambient temperature [°C]	-25...80	
Storage temperature [°C]	-40...100	
Protection	IP 67	
Tests / approvals		
EMC	EN 61000-4-2 ESD: EN 61000-4-3 HF radiated: EN 61000-4-4 Burst: EN 61000-4-6 HF conducted:	4 kV CD / 8 kV AD 10 V/m 2 kV 10 V
Shock resistance	DIN IEC 68-2-27:	50 g (11 ms)
Vibration resistance	DIN IEC 68-2-6:	20 g (10...2000 Hz)
MTTF [Years]	704	
Mechanical data		
Process connection	G 1/4 A / M5 I	
Materials (wetted parts)	stainless steel 316L / 1.4404; FPM (Viton)	
Housing materials	PBT (Pocan); PC (Makrolon); FPM (Viton); stainless steel 316L / 1.4404	
Switching cycles min.	50 million	
Tightening torque [Nm]	25	
Weight [kg]	0.093	
Displays / operating elements		
Display	Operation LED green Switching status LED yellow	
Electrical connection		
Connection	M12 connector	
Wiring		
2 1 3 4		
Remarks		
Remarks	*) Setting accuracy **) BFSL = Best Fit Straight Line / LS = Limit Value Setting	
Pack quantity [piece]	1	