


## EVT042

VDOGH040VAS0001E04STGH040VAS

Connection technology

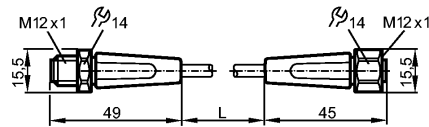

### Product characteristics

Jumper

M12 plug / M12 socket

Free from silicone

Gold-plated contacts

–

For hygienic and wet areas in the food industry

### Electrical data

Electrical design		AC/DC
Operating voltage [V]		250 AC / 300 DC
Current rating [A]		4
Protection class		II

### Environment

Ambient temperature [°C]		-25...100, cRUUs: max. 50 °C
Ambient temperature (moving) [°C]		5...100, cRUUs: max. 50 °C
Protection		IP 65 / IP 67 / IP 68 / IP 69K



### Mechanical data

Design		straight / straight
Material body		housing: PVC orange; sealing: EPDM
Material nut		stainless steel 316L / 1.4404
Tightening torque for knurled nut [Nm]		plug: 0.6...1.5 *) / socket: 0.6...1.5
Weight [kg]		0.067

### Electrical connection

Connection		PVC cable / 1 m; 4 x 0.34 mm <sup>2</sup> (42 x Ø 0.1 mm); Ø 4.9 mm
Sheath colour		orange

### Wiring



### Remarks

Remarks		*) Take into account the maximum value of the counterpart!
Pack quantity [piece]		1

**ecomat 400<sup>®</sup>**



**EVT042**

VDOGH040VAS0001E04STGH040VAS

**Connection technology**

ifm electronic gmbh • Friedrichstraße 1 • 45128 Essen — We reserve the right to make technical alterations without prior notice. — GB — EVT042 — 30.06.2010